

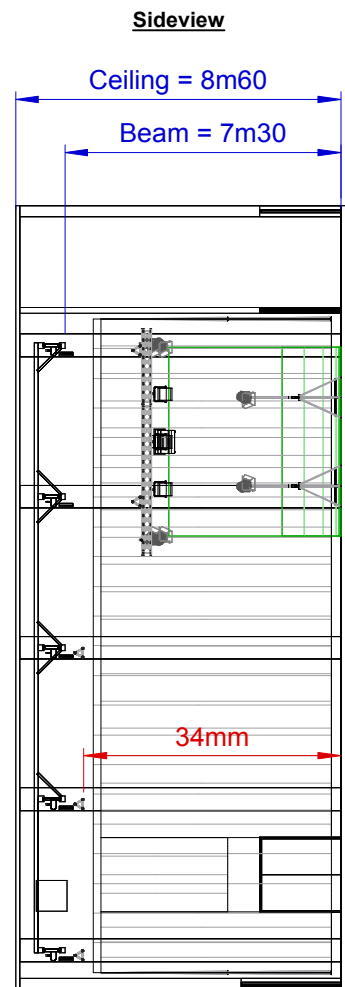


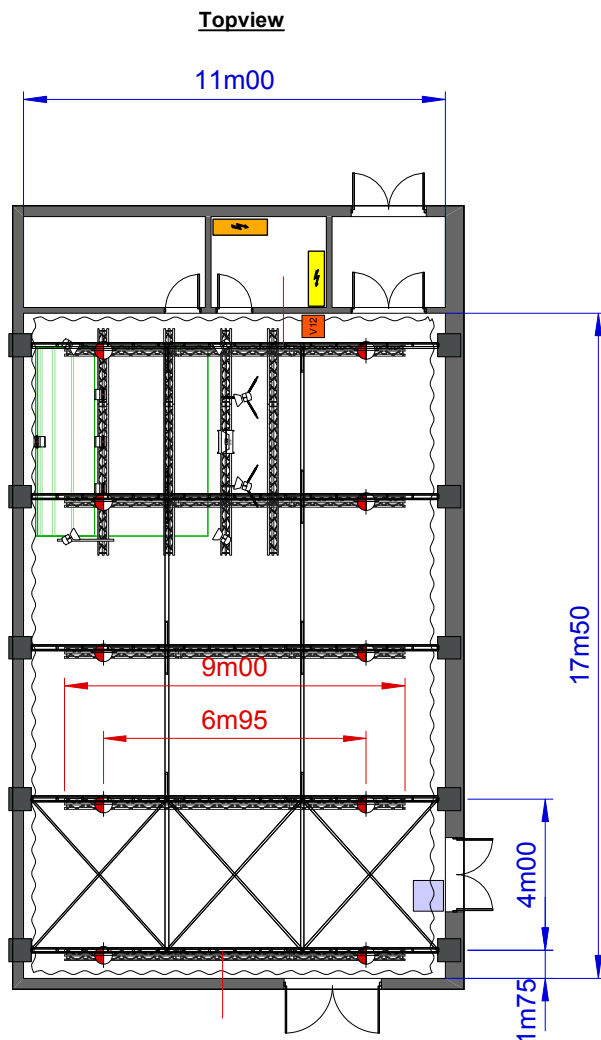

Frontview

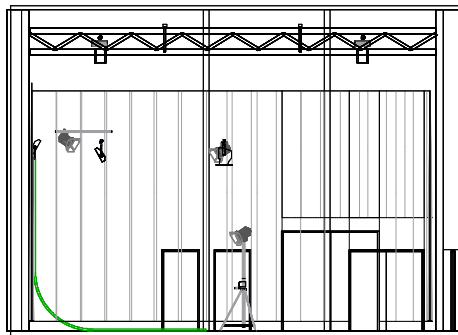

Dimensions Studio

Surface studio floor = 193m²
Dimensions Entrance Gate = 2m50W x 2m60H

Dimensions Beams Studio

Height to beams = 07m30
Height to ceiling = 08m50
Distance between beams = 04m00

Loading Figures Beams Studio

Max. load/beam = 4000kg/beam or qload = 200kg/m
Max. allowed loads/beam
- center point (CPL) = 1700 kg (middle of a beam)
- double point (TPL) = 1400 kg (each point on 1/3th of the total beam length)
Max allowed floorpressure = 1000kg/m²

Electrical Power

2 x CEE125A connection 5p (3PH+N+E)
2 x CEE32A connection 5p (3PH+N+E)
Cable passages to backstage area and technical area
Main Circuit board

Standard Rigging & Trussing

05 x Black X30D truss, length = 9m00
Each truss rigged on 2 x 0,5T Hoist
Span between hoists = 06m95
Maximum trim = 06m80
All hoist rigged upside down
04 x Black X30D truss, length = 6m00
Trusses are scaffold underneath 2 x 9m00 trusses (above greenkey)
See plan for exact dimensions.
02 x Manfrotto WindUp Black, on wheels
01 x V12 Hoistcontroller
The hoistcontroller is connected to one of the existing CEE32A connectors, but can be unplugged if required.

Standard Lighting kit

06 x ACP 1kW (4 installed in the trussing, 2 on a WindUp)
05 x Softlight 2kW (installed in trussing)
06 x ACP 1kW (4 installed in the trussing, 2 on a WindUp)
01 x Dimmerrack - 12ch
The dimmer is connected to one of the existing CEE32A connectors, but it can be unplugged if required.
01 x Leprecon 624 (Small conventional lighting desk)

Other Information:

The studio is equipped with a heating system.

 AED Studios Fabriekstraat 38 2547 Lint Belgium www.aedstudios.com	Studio/Room	Studio 05 Overview	Papersize A4
	Plan type		Units [mm]
			Scale 1:200
			Version V1